

EziVac Risk Minimisation

The EziVac is a drum mounted vacuum pump used for removal of fluid from sumps, tanks and clean-up of spills. It is capable of vacuuming semi-solid liquids as well as transferral of said liquids from drum to an alternate storage tank.

Warning - The assembly and operating instructions must be read and understood before using EziVac products.

The EziVac is designed to be used in the following manor;

- Not to be used with flammable liquids.
- Do not exceed 100psi air supply this may collapse a drum under vacuum.
- Only use drums that are in good condition, with no dents. Compromised drums may collapse under vacuum.
- Only vacuum liquids from 0 to 60°C.
- Use hearing protection at all times.


Warranty Summary - Refer to www.apolloengineering.com.au\express warranty policy for Terms and Conditions





Assembly and operating instructions

- **1.** Fit the nitto fitting to the slide valve on the Ezivac.
- 2. Install the Ezivac into the ¾" drum port.
- **3.** Screw the control knob on the Ezivac all the way out to ensure the Ezivac is set to vacuum.
- **4.** Connect Tube 1 to Tube 2 using the stainless socket.
- **5.** Screw the Tube 1 into the bottom of the bush.
- **6.** Screw the elbow into the top of the bush.
- **7.** Screw the camlock adapter into the elbow.
- **8.** Cut the end off tube 2 so that it sits off the bottom of the drum by approximately 20mm.
- **9.** Screw the assembly into the 2" drum opening.
- 10. Connect the hose to the camlock coupling.
- **11.** Insert the adapter into the opposite end of the hose to the camlock coupling.
- 12. Insert the wand into the adapter.
- **13.** Insert the gulper tool or the crevice tool into the wand.

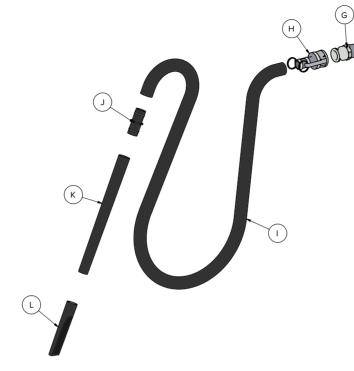






- A. Drum (not included)
- B. EziVac
- C. Tube 1 and 2
- D. Stainless Socket
- E. S/S Bush
- F. Elbow
- G. Camlock Adapter

- H. Camlock Coupler
- I. Hose
- J. Hose Joiner
- K. Wand
- L. Crevice Tool
- M. Gulper

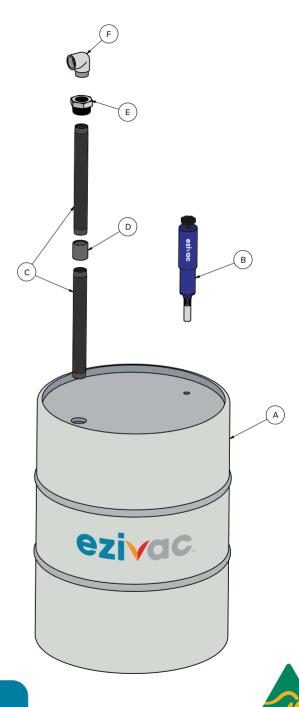

For more information and videos apolloengineering.com.au/ezivac