



# Agitating Hot Tanks

**Save time, money  
& the environment**


Simple, Safe Operation and Faster Cleaning

Long Term Chemical Life

Saves up to 75% on Chemicals over the life of the machine

Saves up to 25% on Electricity

Saves man hours and increases workshop productivity

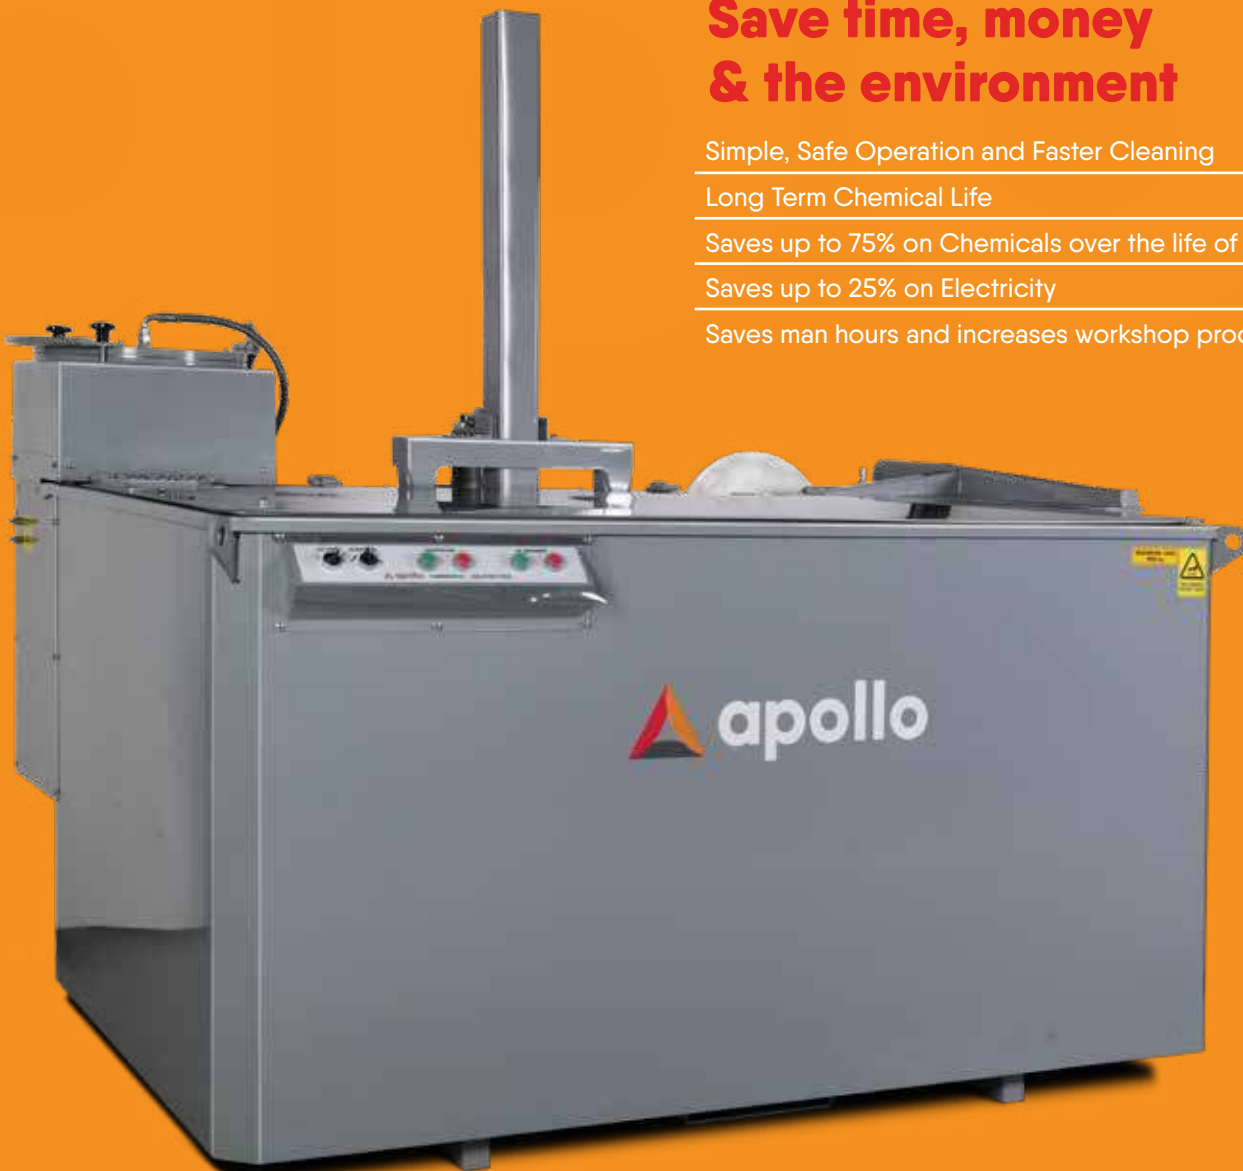

**75%** UP TO  
**CHEMICAL SAVINGS**

**25%** OVER  
**ELECTRICITY SAVINGS**

**100%**  
**AUSTRALIAN MADE**



[apolloengineering.com.au](http://apolloengineering.com.au)



# Agitating Hot Tanks



## Features

- Centrifugal filtration of the chemical solution provides massive reduction in;
  - Chemical cost - A 75% saving over the life of the machine
  - Consumable costs - no consumable filters required. Cleaning of the centrifuge and pot strainer takes approximately 20 minutes per month
- **No filters to replace** cleaning of the centrifuge and pot strainer approximately 20 minutes per month
- Indefinite caustic life
- Pneumatically or hydraulically controlled lid and platform (depending on model) allows for easy loading of parts and agitation of the platform to improve cleaning cycle times
- Surface oil is removed using a disk type skimmer to ensure the parts are not covered in oil when they are removed
- **Reduced operating costs** programmable 7 day time allows for the heating elements to be operate during off peak periods to heat the solution
- Optional rinse bay to rinse parts once they're been removed from the hot tank

**HEAVY DUTY**  
FULLY INSULATED CONSTRUCTION

**NO PRECLEAN**  
REQUIRED ON PARTS

## SPECIFICATIONS

Model	AT200	AT400	AT800	AT2000	AT4000	AT5500	AT10000
Platform (L x W mm)	740 x 380	1000 x 600	1210 x 780	1860 x 930	2400 x 1020	2660 x 1420	3720 x 1410
Floor Space (L x W mm)	1020 x 790	1260 x 1035	1450 x 1450	2200 x 1650	3000 x 1870	3050 x 2320	4230 x 2440
Working Depth (mm)	430	600	600	700	1050	1050	1080
Platform Raised (mm)	720	860	1000	1100	1520	1520	1750
Max. Load (Kg)	75	175	400	900	2000	2500	4000
Power Required	415V, 10A	415V, 10A	415V, 20A	415V, 32A	415V, 60A	415V, 100A	415V, 150A
Element Size	3 x 2.4Kw	3 x 2.4Kw	3 x 3.6Kw	3 x 6Kw	6 x 6Kw	9 x 6Kw	12 x 8Kw
Oil Skimmer	N/A	N/A	N/A	Standard - Can be removed as an option			
Certrifugal Filter	N/A	N/A	Standard - Can be removed as an option				



**apollo**

Manufactured by

Apollo Engineering  
47 Barnes Street,  
Tamworth NSW 2340  
Ph 02 6765 7353  
Fax 02 6765 3612

Distributed by

**AMDS Trade & Industrial**

303 Copland St, Wagga Wagga NSW 2650

Ph: 02 6921 2011 E: equipment@amds.com.au

Contact : Malcolm Irvin - 0428 212 011 or Chris Smith - 0428 850 860