



JETWAVE®

HIGH PRESSURE CLEANERS

Distributed by:



303 Copland St, Wagga Wagga NSW 2650
Ph 02 6921 2011 - Malcolm 0428 212 011
E: equipment@amds.com.au Web: www.amds.com.au

TX™ 12-100 1500 psi • 12 l/pm



Single Phase
Electric



Cold Water



Daily Usage

FIELDS OF APPLICATION

- Wall Washing
- Patio Cleaning
- Painting Contractors
- Cleaning Contractors
- Machinery Washdown
- Agricultural Equipment
- Car and Equipment Yards

The TX12-100 is a professional pressure washer that has stood the test of time. Engineered and assembled using only the best quality Italian components.



STANDOUT FEATURES



Professional Italian triplex Interpump delivers performance and longer life.



Low speed professional pump for increased reliability and longer maintenance intervals.



Maintenance free low speed, electric motor, air cooled and protected with thermal cut-out.



Dual M22 screw hose coupling system.



Washable inlet water filter.



Professional line accessories.



Integrated accessory storage for hose, gun and power cord.



0-30° variable spray patterns hi-lo (soap) nozzle.



Jetwave Group
 10-16 Smith Street Thebarton I
 Adelaide I South Australia I 5031 I AU
 +61 8 8371 3599
 sales@jetwave.com.au
 jetwave.com.au

Robust - Sturdy high-impact resistant ABS plastic cover.


Quality - Industry proven 'Italian' pump.

Ergonomics - Trolley frame designed with handle for durability.



Portability - Heavy duty rubber wheels.

STANDARD EQUIPMENT

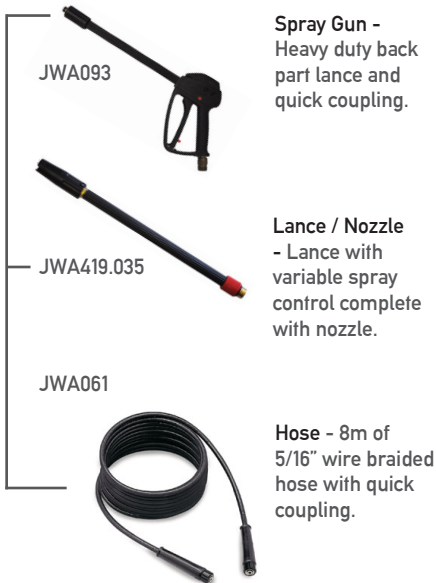

Spray Gun - Heavy duty back part lance and quick coupling.

Lance / Nozzle - Lance with variable spray control complete with nozzle.

Hose - 8m of 5/16" wire braided hose with quick coupling.

Product Code	p/n	00105
--------------	-----	-------

TECHNICAL DATA

Working Pressure	psi / bar	1500 / 100
Flow Rate	l/pm	12
Max Water Inlet Temp	°c / °f	60 / 140
Class (AS/NZS 4233.1:2013)	grade	A

INTENDED APPLICATION

Usage hour	hours / type	3 - 4 daily / Continuous
Category of Dirt / Debris	type	Light

ELECTRICAL FEATURES

Motor	type	Induction
Power Supply	Ph / V / Hz	1 / 240 / 50
Absorbed Power	kW / pole (rpm)	3.2 / 4 (1450)
Cable Length	metres	5
Control	type	Bypass System™ (BPS)

HYDRAULIC FEATURES

Pump / Head / Pistons	type	Interpump Plunger Triplex / Brass / Ceramic
Motor Pump Coupling	type	Direct Drive
Pump Speed	rpm	1450
Unloader Valve	type	Integral
Safety Valve	y / n	N
Orifice / Nozzle	size	055

OTHER FEATURES

Adjustable Pressure	y / n	Y
Hose Reel Provision	y / n	N
Onboard Accessory Storage	y / n	Y
Detergent Injector	y / n	Y - Onboard tank adjustable

DIMENSIONS & WEIGHT

Approx Weight	kg	48 unit / 52 boxed
Unit Dimensions	mm	900(L) x 390(W) x 850(H)
Boxed Dimensions	mm	630(L) x 430(W) x 640(H)
Number per Pallet	type: pieces	AS: 4 or 8 / Euro: 2 or 4

WARRANTY(S)

Motor Warranty*	year(s)	2	
Pump Warranty*	year(s)	2	

OPTIONAL ACCESSORIES

Complete Turbo Head with Lance	p/n	JWA160.03
Additional High Pressure Hose (per metre)	p/n	52003
JW3 Foaming Lance with Tank	p/n	JWA221
Hammerhead FSC 15"	p/n	JWA-FSC15
Sandblasting Kit	p/n	JWA164
Sludge Kit	p/n	80005
Vulcan V1 Hotbox	p/n	10199
Drain Cleaning Hose	p/n	HOP2X15VF-ASSY

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).