

# SENATOR™ SILENT 200-41



**3000**  
200 BAR  
**PSI**

**41**  
**L/PM**

**KOHLER KD1903**  
**42HP**  
**DIESEL**  
**ENGINE TYPE**  
KOHLER Diesel

**DIRECT**  
**1500RPM**  
**DRIVE**

**COLD**  
**WATER**  
**OUTPUT**



## HERO INNOVATIONS



**PEXO™**  
Enclosed Design



**JWPP™**  
Jetwave Italian Premium Pump



**INTELIUMS™**  
LCD Control System



**OLCE™**  
Oversized Liquid Cooled Engine



**ULDO™**  
Ultra Low Decibel Output



**CLASS B** AS/NZS 4238.1  
HIGH PRESSURE CLEANER  
#10 CERTIFICATION IS REQUIRED FOR OPERATORS



## APPLICATIONS

- Industrial Cleaning
- Factories & Manufacturing
- Mine Sites
- Oil & Gas



## STANDOUT FEATURES



JW® UDOR® Premium Italian plunger pump running at 1500RPM direct with soft coupling to the engine, allows longer life and no reduction method.



Oversized Liquid Cooled Kohler™ KDI1903 42HP diesel engine that optimises all speeds and loads.



Intelium™ LCD Unit management system displays live data read outs, warnings and auto shutdown to protect the units critical components.



Sound proof cabinet ensures ultra low noise emissions approx 70dB allowing after hours cleaning in built up areas



Enclosed steel cabinet protection keeps all critical working components safe from weather and operator error.



Battery isolator & emergency stop. Lockable diesel fuel fill point for added safety.

## STANDARD EQUIPMENT




**Gun:** J5500k low trigger force gun w/swivel & lance coupling system.

**Lance:** JW Straight stainless steel lance w/ snap coupling + nozzle w/protector & tail





**Hose:** 15m non marking double wire braid hose w/M22 couplings



G2 WASHBOX VIDEO

## DIMENSIONS (MM)

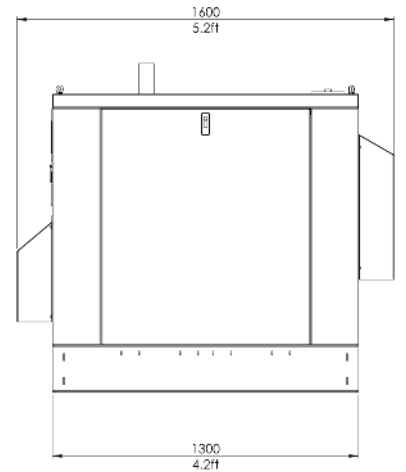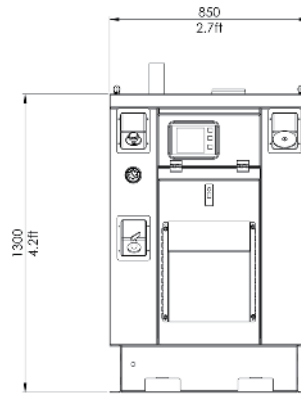

## TECHNICAL DATA 0:00

## SENATOR™ SILENT 200-41

Product Code	CW3000-41DI
Pressure / Flow Rate	3000 PSI (200 BAR) / 41 L/PM (2460 L/PH) / 10.8 GPM
Max Water Inlet Temp	60°C / 140°F
Class (AS/NZS: 4223)	Class B (8,200 Bar/Litres)
Usage Frequency	Industrial: Continuous Usage
Nozzle Size	12
Frame Structure	CNC Modular skid galvanised steel chassis plus satin powder coat finish w/removable side covers

## MOTOR FEATURES

Engine / Power	Kohler™ KDI1903 Electric Push Button Start (liquid cooled) 42HP / 1861cc
Fuel Type / Capacity / Protection	Diesel / 80L / IntelliUMS™ Auto Shutdown Protection

## HYDRAULIC FEATURES

Pump / Head / Pistons	JW® UDOR® Premium Triplex Plunger / Brass (Nickle Plated) / Ceramic
Motor Pump Coupling / Pump RPM	Direct Soft Coupling / 1500RPM
Unloader Valve	Independent
Safety Valve	Yes

## DIMENSIONS & WEIGHT

Machine Dimensions / Weight	Skid: 1600mm(L) x 850mm(W) x 1300mm(H) / 530KG
-----------------------------	--

## WARRANTY(S)

Unit / Pump Warranty*	 2 Years
Engine Warranty*	<b>KOHLER</b> .Diesel 3 Years

## OPTIONAL ACCESSORIES

30" FSC - Stainless Steel JWA-FSC30CMPL.09

## OPTIONAL UPGRADES

Dual Operator Upgrade Kit JWA432  
Mine Specification Kit SILENTMINESPEC

Copyright © 2023 Jetwave® Group Pty Ltd. All Rights Reserved.

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

\*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V3.0 08/23



 303 Copland Street, East Wagga Wagga NSW 2650

 [equipment@amds.com.au](mailto:equipment@amds.com.au)

 (02) 6921 2011 or 0428 212 011

 [www.amds.com.au](http://www.amds.com.au)