

SENATOR™ SILENT 275-20



4000
200 BAR
PSI

20
L/PM

KOHLER KD11903
42HP
DIESEL
ENGINE TYPE
KOHLER Diesel

DIRECT
1500RPM
DRIVE

COLD
WATER
OUTPUT



HERO INNOVATIONS



PEXO™
Enclosed Design



JWPP™
Jetwave Italian Premium Pump



INTELUMS™
LCD Control System



OLCE™
Oversized Liquid Cooled Engine



ULDO™
Ultra Low Decibel Output



CLASS A AS/NZS 4233
PRESSURE CLEANER
NO RPT CERTIFICATION REQUIRED FOR OPERATORS

UDOR
WATER POWER

APPLICATIONS



Tradesmen



Factories & Manufacturing



Mine Sites



Offshore Oil & Gas



STANDOUT FEATURES



JW® UDOR® Premium Italian plunger pump running at 1500RPM direct with soft coupling to the engine, allows longer life and no reduction method.



Oversized Liquid Cooled Kohler™ KD11903 42HP diesel engine that optimises all speeds and loads.



InteliumS™ LCD Unit management system displays live data read outs, warnings and auto shutdown to protect the units critical components.



Sound proof cabinet ensures ultra low noise emissions approx 70dB allowing after hours cleaning in built up areas



Enclosed steel cabinet protection keeps all critical working components safe from weather and operator error.




Battery isolator & emergency stop. Lockable diesel fuel fill point for added safety.

STANDARD EQUIPMENT



Gun: J5500k low trigger force gun w/swivel & lance coupling system.



Lance: JW Straight stainless steel lance w/ snap coupling + nozzle w/protector & tail




Hose: 15m non marking double wire braid hose w/M22 couplings








Chemical: JW easy foam kit w/1L bottle

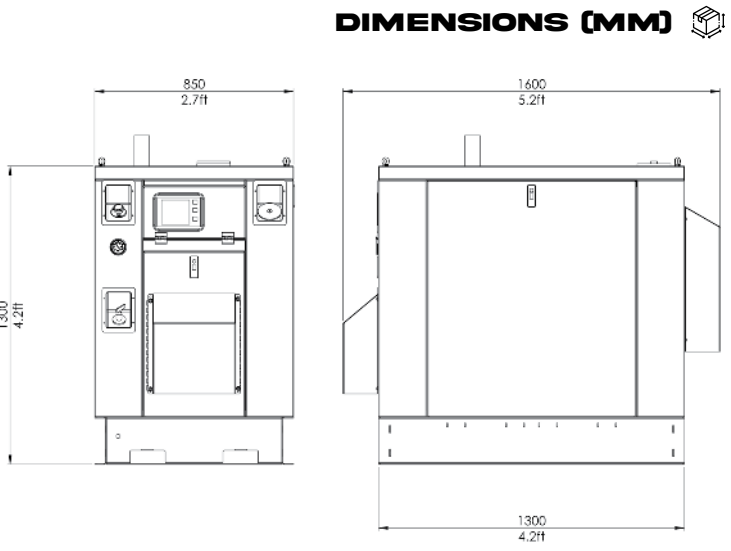

G2 WASHBOX VIDEO



TECHNICAL DATA 0:00		SENATOR SILENT 275-20	
Product Code	CW4000-20DI		
Pressure / Flow Rate	4000 PSI (275 BAR) / 20 L/PM (1200 L/PH) / 5.3 GPM		
Max Water Inlet Temp	60°C / 140°F		
Class (ASNZS: 4223)	Class A (5,500Bar/Litres)		
Usage Frequency	Industrial: Continuous		
Nozzle Size	05		
Frame Structure	CNC Modular skid galvanised steel chassis plus satin powder coat finish w/removable side covers		
MOTOR FEATURES 			
Engine / Power	Kohler™ KDI1903 Electric Push Button Start (liquid cooled) 42HP / 1861cc		
Fuel Type / Capacity / Protection	Diesel / 80L / InteliUMS™ Auto Shutdown Protection		
HYDRAULIC FEATURES 			
Pump / Head / Pistons	JW® UDOR® Premium Triplex Plunger / Brass (Nickle Plated) / Ceramic		
Motor Pump Coupling / Pump RPM	Direct Soft Coupling / 1500RPM		
Unloader Valve	Independent		
Safety Valve	Yes		
DIMENSIONS & WEIGHT 			
Machine Dimensions / Weight	Skid: 1600mm(L) x 850mm(W) x 1300mm(H) / 530KG		
WARRANTY(S) 			
Unit / Pump Warranty*		2 Years	
Engine Warranty*	KOHLER.Diesel	3 Years	
OPTIONAL ACCESSORIES		OPTIONAL UPGRADES	
21" FSC - Stainless Steel	JWA-FSC22-5CMPL	Mine Specification Kit	SILENTMINESPEC