

# HORNET™ G2D 210-15



**3150**  
21.0 BAR  
**PSI**

**15**  
**L/PM**

**KOHLER KD15 - 440**  
**DIESEL**  
**ENGINE TYPE**  
KOHLER Diesel

**GEARBOX**  
1450RPM  
**DRIVE**

**COLD**  
**WATER**  
**OUTPUT**



## HERO INNOVATIONS



**PEXO™**  
Stainless Steel Exoskeleton



**JWPP™**  
Jetwave Italian Premium Pump



**CC™**  
Centralised Control



**AVPS™**  
Anti Vibration Protection System



**MC™**  
Multi Configuration



LEARN MORE



HorNet G2 Video



Registered Design © 202215870

## APPLICATIONS



Tradesmen



Construction/Earth Moving



Mine Sites



Hire & Rental



## STANDOUT FEATURES



JW® UDOR® Premium Italian plunger pump running at 1450RPM, delivers more performance and longer life.



Industrial Kohler™ KD15-440 series air cooled engine, with cyclonic air pre filter and twin fuel filtration for increased reliability.



Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.



Zero line pressure brass adjustable unloader valve.



Battery isolator to prevent battery voltage loss, when not in use.




Emergency stop for increased operator safety.

## STANDARD EQUIPMENT



**Gun:** J5500k low trigger force gun w/swivel & lance coupling system.  
**Lance:** JW Straight stainless steel lance w/ snap coupling + nozzle w/protector & tail

## DIMENSIONS (MM)

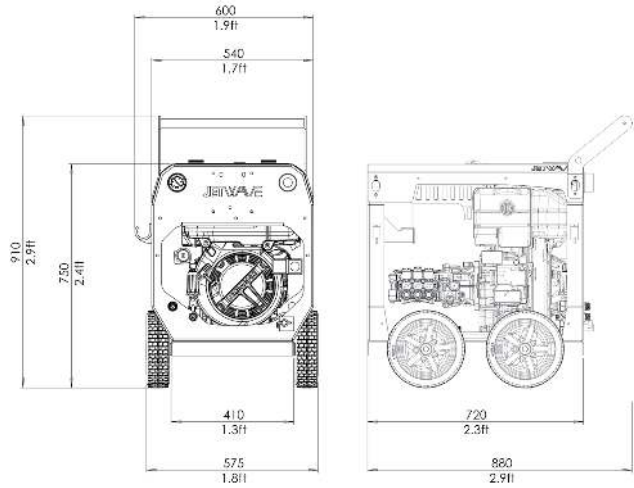

## TECHNICAL DATA 0:00

## HORNET™ G2D 210-15

Product Code	CW3000-15DG2
Pressure / Flow Rate	3150 (210 BAR) / 15 L/PM (900 L/PH) / 4 GPM
Max Water Inlet Temp	60°C/ 140°F
Class (AS/NZS: 4223)	A (3.150 Bar/Litres)
Usage Frequency	Professional: Daily Usage
Nozzle Size	045
Frame Structure	CNC modular galvanised steel chassis plus satin powder coat finish and <b>stainless steel cover</b>

## MOTOR FEATURES

Engine / Power	Kohler™ KD15-440 Electric Key Start (air cooled) 10HP / 441cc
Fuel Type / Capacity / Protection	Diesel / 3.4L / Low Oil Shutdown

## HYDRAULIC FEATURES

Pump / Head / Pistons	JW® UDOR® Premium Triplex Plunger / Brass (Nickle Plated) / Ceramic
Motor Pump Coupling / Pump RPM	Gearbox Drive / 1450RPM
Unloader Valve	Independent (Zero) - Adjustable (Panel Mounted)
Safety Valve	Yes

## DIMENSIONS & WEIGHT

Machine Dimensions / Weight	880mm(L) x 575mm(W) x 910mm(H) / 102KG (approx.)
-----------------------------	--

## WARRANTY(S)

Unit / Pump Warranty*	 2 Years
Engine Warranty*	<b>KOHLER</b> .Diesel 3 Years

## OPTIONAL ACCESSORIES

30m Hose Reel	1060CMLP-HD30M
JW Pro Turbo Head	JWA303-045
21" Hammerhead FSC - Stainless Steel	JWA-FSC22-5.045

## OPTIONAL UPGRADES

Engine Hour Meter	ACD-TACHO
Centre Balanced Top Lift Kit	JWA551-D
Forklift Pocket/Mounting Base	JWA-FLB
Mine Specification Kit	G2DMINESPEC-A

Copyright © 2023 Jetwave® Group Pty Ltd. All Rights Reserved.

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.  
 \*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V3.0 08/23



 303 Copland Street, East Wagga Wagga NSW 2650

 [equipment@amds.com.au](mailto:equipment@amds.com.au)

 (02) 6921 2011 or 0428 212 011

 [www.amds.com.au](http://www.amds.com.au)