JETWAVE® WATER JETTING SYSTEMS

A.M.D.S.

SCORPION™ G2 350-23

5075	23	HONDA V-TWIN GX690 PETROL	GEARBOX	COLD WATER
350 BAR PSI	L/PM	ENGINE TYPE (POWERED by HONDA)	1450RPM DRIVE	OUTPUT

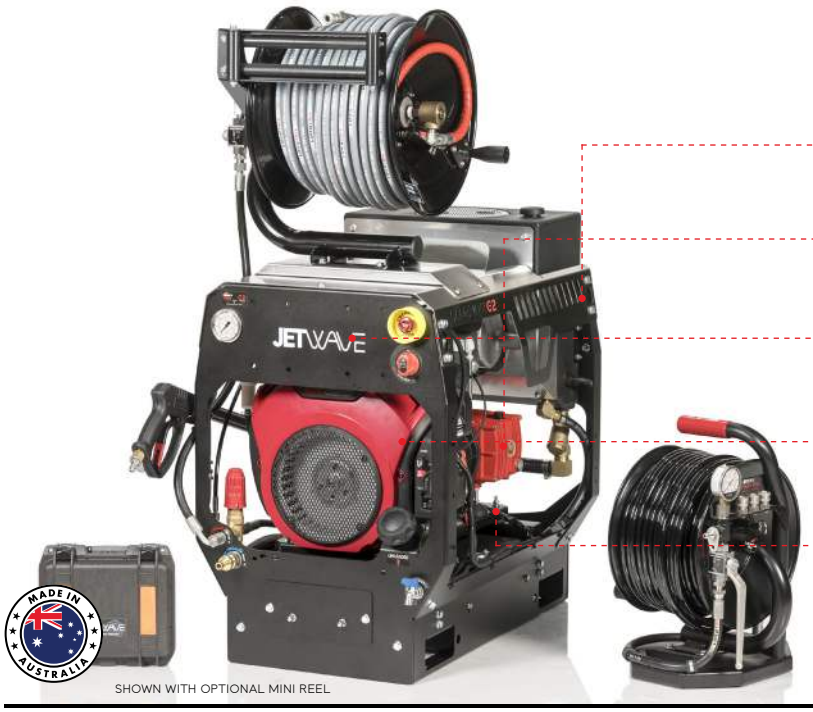

SHOWN WITH OPTIONAL MINI REEL

HERO INNOVATIONS

PEXO™
Stainless Steel Exoskeleton

JWPP™
Jetwave Italian Premium Pump

CC™
Centralised Control

MC™
Multi Configuration

AVPS™
Anti Vibration Protection System

CLASS B AS/NZS 4233.1 WATER JETTER
RTO CERTIFICATION IS REQUIRED FOR OPERATORS

CE UDOR WATER POWER

Registered Design ® 202215872

APPLICATIONS

- Plumbers
- Council & Municipality
- Drain Cleaning
- Water Authorities

STANDOUT FEATURES

- **JW® UDOR® Premium** Italian plunger pump running at 1450RPM, delivers more performance and longer life.
- Electric start Industrial V-Twin **Honda™ GX690** Series Engine, with digital engine hour meter.
- Integrated **forklift pockets** & **mounting points. Jetwave Safety System™** (JSS) safety valve to prevent over pressurisation.
- Seamless & sealed **40L on-board oversized water bypass tank** with low level cut out, for unit water supply and pump protection.
- **Battery isolator & Emergency stop** for increased safety and longevity.
- **Seamless under chassis mounted 25L fuel tank** (w/level gauge) protected from heat with front fill point safety.

G2 MORE FEATURES. MORE INNOVATION. MORE TECHNOLOGY.

JETWAVEGROUP.COM

STANDARD EQUIPMENT

Gun: J5500k low trigger force gun w/swivel & lance coupling system.

Lance: JW Straight stainless steel lance w/snap coupling + nozzle w/protector & tail

Hose: 60m 3/8" [illegible] hose.

Hose Reel: 60m Pro rapid style w/ball valve & hose reel roller guides (HGS™)

Nozzles: JW Professional nozzle kit IP68 w/pelican case.

Safety: Hose whip restraint.

MULTIPLE CONFIGURATIONS AVAILABLE

DIMENSIONS (MM)

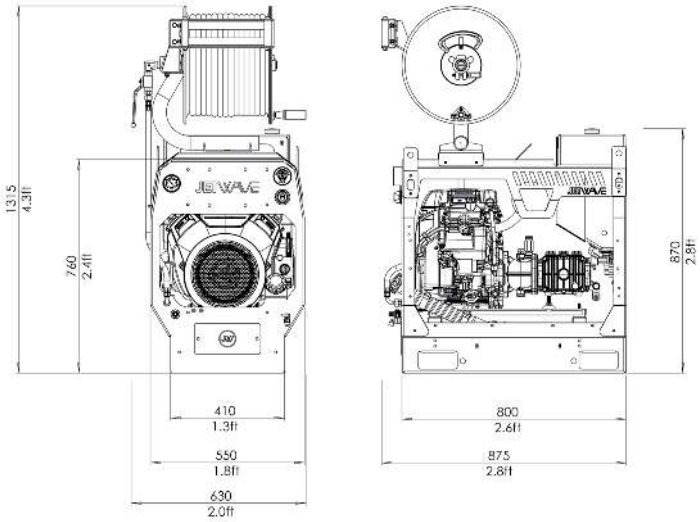

TECHNICAL DATA 0:00

SCORPION G2 350-23

Product Code	HJ5000-23PH
Pressure/ Flow	**5075 PSI** (350 BAR) / **23 L/PM** (1380 L/PM) / **6 GPM**
Max Water Inlet Temp	60°C / 140°F
Class (AS/NZS: 4223)	B (8,050 Bar/Litres)
Usage Frequency	Professional: Daily Usage
Nozzle Size	055
Frame Structure	CNC Modular galvanised steel chassis plus satin powder coat finish and **stainless steel cover**

MOTOR FEATURES

Engine / Power	**Honda™ GX690** Electric Key Start (air cooled) 23HP / 690cc
Fuel Type / Capacity / Protection	Petrol / 25L (w/level gauge) / Low Oil Shutdown

HYDRAULIC FEATURES

Pump / Head / Pistons	**JW® UDOR® Premium** Triplex Plunger / Brass (Nickle Plated) / Ceramic
Motor Pump Coupling / Pump RPM	**Gearbox Drive / 1450RPM**
Unloader Valve	Independent (Panel Mounted)
Safety Valve	Yes

DIMENSIONS & WEIGHT

Machine Dimensions / Weight	Skid No Hose Reel: 875mm(L) x 550mm(W) x 870mm(H) / 195KG (approx.)

WARRANTYS

Unit / Pump Warranty*	2 Years / 3 Years
Engine Warranty*	3 Years

OPTIONAL ACCESSORIES

Remote Mini Reel w/60m 1/4" Hose	PW134-RRCMPL/HOP4
Remote Mini Reel Locking Plate	90012HRH-LP
Forward Root Cutting Nozzle	C43RS
15m Viperflex Whip Hose	HOP2VFX15-ASSY
Jetting Safety Plate	JSP
Class B Double Action Foot Valve	55403-DA

OPTIONAL UPGRADES

Van Alloy Drip Tray + Exhaust Mod	JWA432
4 Wheel Trolley Kit	JWA407A
Front Double Stack Kit	JWA429
Top Double Stack Kit	JWA430
Low Pressure Inlet Hose Reel w/30m hose	1065CMPLLP
Remote Start/Stop	00030

Copyright © 2023 Jetwave® Group Pty Ltd. All Rights Reserved.

The manufacturer reserves the right to modify design features and technical facts without notice; due to our principals of continuous improvement.

*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V3.2 09/23

A.M.D.S.

303 Copland Street, East Wagga Wagga NSW 2650

(02) 6921 2011 or 0428 212 011

equipment@amds.com.au

www.amds.com.au